



## **Best management practices to reduce nitrate pollution in a rural watershed in Germany**

**doi:10.4136/ambi-agua.2099**

**Received: 21 Feb. 2017; Accepted: 01 Sep. 2017**

**Cristiano Andre Pott<sup>1\*</sup>; Nicola Fohrer<sup>2</sup>**

<sup>1</sup>Universidade Estadual do Centro-Oeste (UNICENTRO), Guarapuava, PR, Brasil  
Departamento de Agronomia. E-mail: cpott@unicentro.br

<sup>2</sup>Christian-Albrechts-Universität zu Kiel (CAU), Kiel, Schleswig-Holstein, Germany  
Department of Hydrology. E-mail: nfohrer@hydrology.uni-kiel.de

\*Corresponding author

### **ABSTRACT**

Water pollution by nitrogen originates at diffuse and point sources. In surface aquatic systems, nitrate is one of the most problematic forms of nitrogen, causing phytoplankton and macrophyte growth and consequently water eutrophication. This study evaluated whether the Soil and Water Assessment Tool (SWAT) model can simulate nitrate load in a rural watershed in daily and monthly time increments. The study investigated 462 km<sup>2</sup> of the upper part of the Stör catchment, a typical rural lowland catchment located in Northern Germany. The results showed that simulations of nitrate load at monthly increments are better predictors of observed data than daily simulations. The most effective practices to minimize the NO<sub>3</sub>-N load were the reduction of nitrogen fertilizer application and the increasing of conservation areas, such as field filter strips.

**Keywords:** land use, nitrogen pollution, non-point pollution, SWAT model.

## **Melhores práticas de manejo para reduzir a poluição por nitrato em uma bacia hidrográfica rural na Alemanha**

### **RESUMO**

A poluição da água causada por nitrogênio é originada por fontes difusas e pontuais. Em sistemas aquáticos superficiais, o nitrato é uma das formas mais problemáticas de nitrogênio, causando crescimento de fitoplâncton e de macrófitas e consequentemente a eutrofização da água. Este estudo teve o objetivo de avaliar se o modelo Soil and Water Assessment Tool (SWAT) pode simular a carga de nitrato em uma bacia hidrográfica rural em séries diárias e mensais. Foram investigados 462 km<sup>2</sup> da parte superior da bacia hidrográfica do rio Stör, uma bacia de planície tipicamente rural localizada no norte da Alemanha. Os resultados mostraram que as simulações de carga de nitratos em incrementos mensais são melhores preditores de dados observados do que simulações diárias. As práticas mais efetivas para minimizar as cargas de NO<sub>3</sub>-N foram a redução da aplicação de fertilizante nitrogenado e o incremento de áreas de conservação, tal como as faixas filtro.

**Palavras-chave:** nitrogênio, poluição difusa, modelo SWAT, uso da terra.

## 1. INTRODUCTION

Water pollution problems have been encountered all over the world in the last decades. Many substances are potential pollutants: nutrients used in agricultural systems (Lam et al., 2012; Pieterse et al., 2003), heavy metals (Chon et al., 2012) and pesticides (Fohrer et al., 2014).

In surface water bodies, the nitrogen input plays an important role in water quality because this nutrient is essential for phytoplankton (Wu et al., 2011) and macrophyte growth (Jarvie et al., 1998) and for water eutrophication (Cao et al., 2011). According to Grabowska (2012), favorable conditions for phytoplankton growth consists if total N > 1.5 mg L<sup>-1</sup>.

Nutrients enter surface waters through point or diffuse sources (Jamshidi et al., 2010; Lam et al., 2010; Merseburger et al., 2011). Point sources can enter at fixed locations, e.g. wastewater treatment plant outlets, industries, pig farms or aquaculture (Merseburger et al., 2011). While point sources cause abrupt hydrological and chemical discontinuities along the stream, diffuse sources are not as spatially discrete and cause more gradual changes (Lam et al., 2010; Merseburger et al., 2011).

Diffuse sources contribute through many different pathways and are highly dependent on land use and management (Kronvang et al., 2008; Pieterse et al., 2003). The application of N fertilizer in agriculture and pasture areas is the major source of diffuse pollution (Jarvie et al., 2010; Lam et al., 2010). Fertilizer management is one way to reduce nutrient loads in surface water bodies (Pieterse et al., 2003). According to Kronvang et al. (2008), the measures applied in the agricultural production system need to focus on improved utilization of animal manure, fertilizer and crop rotation plans, maximized utilization of feed-stuffs and limitations on total N application.

Diffuse pollution is one of the most challenging issues in catchment management (Chon et al., 2012). To reduce water pollution, public policies aim to change agricultural practices by supporting land use and management practices that limit the risks of N transfers to streams. These practices are called environment-friendly or best management practices (BMPs), and consist of catch crops, reduced fertilization, conversion of arable land to pasture, grass filter strips, no tillage and conservation tillage systems (Laurent and Ruelland, 2011).

The effectiveness of BMPs for the reduction of agricultural non-point sources of pollution is difficult to evaluate and the monitoring of such changes would be costly and time consuming (Liu et al., 2013). After adequate calibration and validation of a ecohydrological model, such as the Soil and Water Assessment Tool (SWAT) model (Arnold et al., 1998), new simulation with an alternative BMP (Lam et al., 2011; Laurent and Ruelland, 2011; Liu et al., 2013) can be modeled.


This study therefore sought to calibrate and validate nitrate load using the SWAT model to verify which environmental measures can reduce N loads in a rural lowland catchment.

## 2. MATERIAL AND METHODS

### 2.1. Characterization of the study area

The river Stör, a tributary of the river Elbe, is located in the lowland area of Schleswig-Holstein in Northern Germany (Figure 1A). In this study, 462 km<sup>2</sup> of the upper part of the Stör catchment up to the Willenscharen discharge gauging station were under investigation, because the lower part is already influenced by the tide of the North Sea. The topography is very flat and varies between 90 and 1 m above sea level (Figure 1B). The main tributaries of the upper Stör are the Aalbek, Buckener Au, Bünzener Au, Dosenbek, Höllenau and Schwale (Figure 1B). The main soils (Figure 1C) in the upper Stör catchment are Histosol, Gley, Gley-Podsol, Cambisol, Podsol, Planosol and Luvisol (Finnern, 1997). The mean annual precipitation is 851 mm and the mean annual temperature is 8.2°C at the Neumünster weather station (DWD, 2012).

Land use is dominated by arable land and pasture (Figure 1D). According to Oppelt et al. (2011), in 2010 the pasture area was 33.1% of the total area. The major crops are winter wheat (13.7%), rapeseed (1.8%) and corn for silage (26.6%). The urban area is about 10% of the total area. The most important city is Neumünster, with nearly 88,000 citizens.

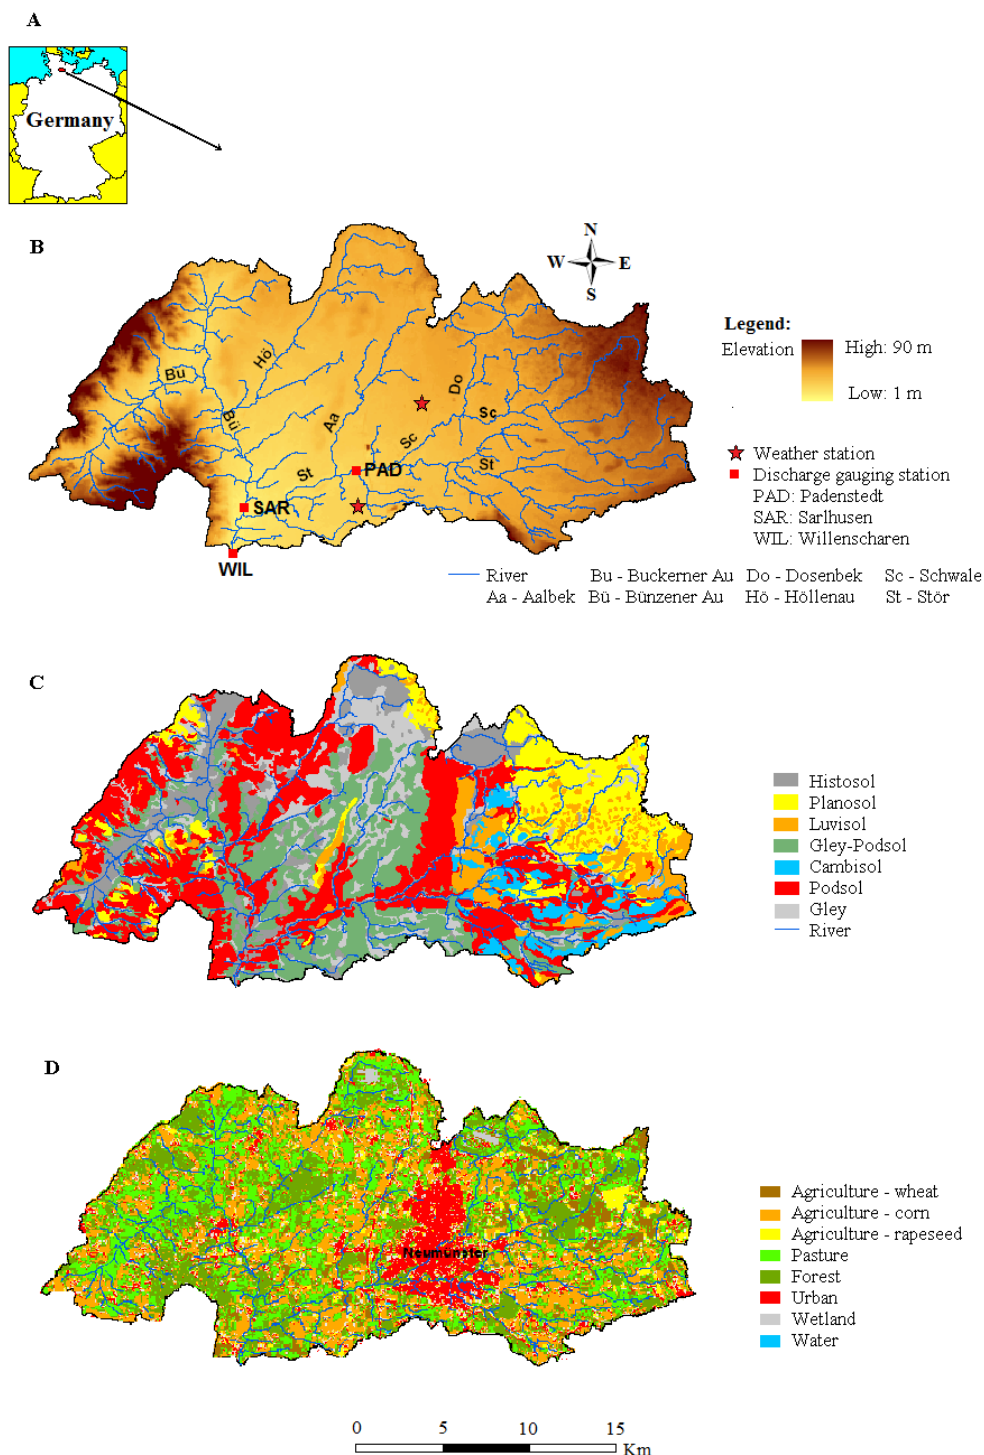

**Figure 1.** Location of the upper Stör catchment (A), elevation map with its main tributaries and the localization of the discharge gauging stations (B); soil map (C); land use map (D).

## 2.2. Calculation of nitrate loads

Monthly NO<sub>3</sub>-N loads were calculated using the data of a monthly water quality monitoring campaign from August 2009 until July 2011, which was multiplied by the mean monthly discharge data obtained by the gauging stations of LKN (2012) that have daily monitoring. Daily NO<sub>3</sub>-N load was calculated with the daily water quality data collected with the automatic water sampler installed at Willenscharen and the respective daily discharge of this gauge station.

## 2.3. SWAT model description

In this study, the software ArcSWAT2009 (Version 2009.93.7b Revision Nr. 488) was used to simulate water discharge nitrate load. It is a SWAT interface for ESRI ArcGIS 9.3.1 SP2 (<http://swat.tamu.edu>). The SWAT model is a continuous model for long-term observations, which run on daily, monthly or annual increments (Neitsch et al., 2011). NO<sub>3</sub>-N load were simulated in daily and monthly increments. The model represents the large-scale spatial heterogeneity of the study area by dividing the watershed into sub-basins. The sub-basins are then further subdivided into hydrologic response units (HRUs) based on homogeneous soils, land use and slopes (Neitsch et al., 2011). The details of all components can be found in Arnold et al. (1998) and Neitsch et al. (2011). The different N processes modeled by SWAT in N pools of the soil are described by Neitsch et al. (2011).

## 2.4. Model calibration and validation

The reliability of results from a model is based on performance of the calibration and validation. Calibration is the process of estimating model parameters by comparing model predictions (output) for a given set of assumed conditions with observed data for the same conditions. Validation involves running a model in a study period different than the calibration period and using input parameters measured or determined during the calibration process (Moriassi et al., 2007).

The standard procedure for the simulation is to use a period of time for the calibration and a subsequent period of time for validation. For this study, the validation in an antecedent time was used (August 8<sup>th</sup> 2009 to August 7<sup>th</sup> 2010), while de calibration period was run between August 8<sup>th</sup> 2010 and August 7<sup>th</sup> 2011. This division was carried out so that the calibration period would conform to the actual land use map dated from July 2010. For all simulations, a five-year warm up period was used for the model in order to stabilize the main water and nutrient processes that occur in the SWAT model. For the NO<sub>3</sub>-N calibration, SWAT-CUP method SUFI-2 associated to manual calibration was carried out using daily and monthly increments. The main parameters which were sensitive for NO<sub>3</sub>-N simulation with SWAT are represented in Table 1.

## 2.5. Performance of the model

To evaluate the performance of a model, measured and simulated values must be compared (Moriassi et al., 2007). Two methods were applied in parallel to calibrate the SWAT model. The measured and simulated values were first subjected to a graphical comparison, then the adjustment by statistical analyses was assessed.

The most important statistical index parameters used in this study to evaluate the performance of the SWAT model were the Coefficient of determination (R<sup>2</sup>), the Nash-Sutcliffe efficiency (NSE) and the Percent bias (PBIAS). R<sup>2</sup> describes the degree of collinearity between simulated and measured data. R<sup>2</sup> ranges from 0 to 1, with higher values indicating less error variance. NSE is a normalized statistic that determines the relative magnitude of the residual variance compared to the measured data variance (Nash and Sutcliffe, 1970). Moriassi et al. (2007) classified the efficiency of nutrients' simulation at monthly increments as "very good" with  $0.75 < NSE \leq 1.0$ , "good" with  $0.65 < NSE \leq 0.75$ , "satisfactory" with  $0.50 < NSE \leq 0.65$

and “unsatisfactory” with  $NSE \leq 0.50$ . PBIAS measures the average tendency of the simulated data to be larger or smaller than their observed counterparts. The optimal value for PBIAS is zero. Positive values indicate model underestimation bias, and negative values indicate model overestimation bias. According to Moriasi et al. (2007),  $PBIAS < \pm 25$  is “very good”,  $\pm 25 \leq PBIAS < \pm 40$  is “good”,  $\pm 40 \leq PBIAS < \pm 70$  is “satisfactory”, and  $PBIAS \geq \pm 70$  is “unsatisfactory” for monthly nutrient simulation increments.

**Table 1.** Main variables used for  $NO_3$ -N load calibration with the SWAT model.

Variable name	Description	Allowable range	Value used
RCN	Concentration of nitrogen in rainfall	0 - 15	2.3
CMN	Rate factor for humus mineralization of active organic nutrients (N and P)	0.001-0.003	0.002
CDN	Denitrification exponential rate coefficient	0 - 3	0.0137
SDNCO	Denitrification threshold of water content	0 - 1	0.85
N_UPDIS	Nitrogen uptake distribution parameter	0 - 100	95
ANION_EXCL	Fraction of porosity from which anions are excluded	0.1 - 1	0.43 [GLPO, LUVI <sup>(1)</sup> 0.40 [PLAN] 0.41 [PODS] 0.50 [CAMB, GLEY, HIST]
IFE_NGW	Half-life of nitrate in the shallow aquifer (days)	0 - 200	1 [PAD] 16 [SAR] 7 [WIL]

<sup>1)</sup> GLPO: Gley-Podsol; LUVI: Luvisol; PLAN: Planosol; PODS: Podsol; CAMB: Cambisol; GLEY: Gley soil, HIST: Histosol.

## 2.6. Input data

The basic data sets required to set-up the model inputs are: topography, soil, land use and climatic data set (Arnold et al., 1998; Neitsch et al., 2011). In this study, the SWAT model was subdivided into 21 sub-basins and 1402 HRUs. The soil map from Finner (1997) and the land use map from Oppelt et al. (2011) was used in this study. Daily climate data sets were obtained by DWD (2012). The classification of the hydrologic soil group (HYDGRP) was ranked as suggested by Neitsch et al. (2011). For the simulation of nutrient balance, the information on management options and fertilizer applications are essential. The management schedules for crop rotation and fertilizer application for the calibration and validation period were created with information from LWK (2011).

## 2.7. Simulation of Best Management Practices scenarios

After calibration and validation of the  $NO_3$ -N load, alternative scenarios were simulated using the principle of best management practices (BMPs). BMPs are used broadly as field



measures which reduce the negative impact of agriculture on the water quality of a river network (Lam et al., 2011). Changes in nutrient load among the scenarios compared to the baseline scenario (current calibrated and validated) provided the percentage of reduction in N and P pollution in the upper Stör catchment. The simulated BMP scenarios were implemented for the period of January 1<sup>st</sup> 2009 to December 31<sup>st</sup> 2011 using the same climatic conditions of the calibration and validation periods. The main BMP scenarios tested in this study are described in Table 2.

**Table 2.** Scenarios simulation based on BMPs to reduce N and P pollution at the upper Stör catchment.

New Scenario code	Description of the new scenarios
DMA20	Decrease of organic manure application of 20%
DMA50	Decrease of organic manure application of 50%
DFA20	Decrease of mineral fertilizer application of 20%
WFS10	Use of 10-m field filter strip
WFS30	Use of 30-m field filter strip
CMB1	Combination of scenarios DMA20, DFA20, and WFS30
CMB2	Combination of scenarios DMA50, DFA20 and WFS10


### 3. RESULTS AND DISCUSSION

Figure 2 shows the daily calibration (August 8<sup>th</sup> 2010 - August 10<sup>th</sup> 2011) and validation period (August 8<sup>th</sup> 2009 - August 7<sup>th</sup> 2010) of NO<sub>3</sub>-N load from the Padenstedt, Sarlhusen and Willenscharen gauge stations. The results of daily NO<sub>3</sub>-N load simulation showed R<sup>2</sup> between 0.63 - 0.95 for the calibration and 0.60 - 0.87 for the validation, NSE between 0.62 - 0.94 in the calibration period and 0.50 - 0.78 in the validation period (Table 3). Figure 3 shows the monthly calibration (August 2010 - July 2011) and validation period (August 2009 - July 2010) of NO<sub>3</sub>-N load from the Padenstedt, Sarlhusen and Willenscharen gauge stations.

Jamshidi et al. (2010), simulating daily NO<sub>3</sub>-N load in a mountainous catchment in Iran, achieved a NSE of 0.55 and 0.36 for the calibration and validation periods, respectively. For monthly simulation, these authors found better NSE, 0.82 and 0.57 for the calibration and validation periods, respectively. Lam et al. (2009) studying daily NO<sub>3</sub>-N load at the lowland Kielstau, found a NSE of 0.64 and 0.50 for the calibration and validation periods, respectively. Pinaras et al. (2010) simulating daily NO<sub>3</sub>-N load with SWAT using monthly measured data obtained very good calibration, with a NSE varying between 0.86 to 0.90 for four gauging stations in a mountainous catchment in Greece. The results of performance of daily NO<sub>3</sub>-N simulation of the Padenstedt and Sarlhusen gauge stations (Figure 2A, Figure 2B, Table 3), where monthly measurement data for the calibration and validation of the model was used, showed very good performance, according to the ranking of Moriasi et al. (2007). However, for the daily calibration with daily measured data, the SWAT modeling does not perform well, as seen in the results of daily NO<sub>3</sub>-N simulation of the Willenscharen gauge (Figure 2C, Table 3).


The daily NO<sub>3</sub>-N load simulation of the Willenscharen gauge station (Figure 2C) showed underestimation of various peaks in the calibration and validation periods; however, at the calibration period, PBIAS = 0.2, indicates a slight overestimation of NO<sub>3</sub>-N load in the simulated data. The monthly NO<sub>3</sub>-N load modeling showed underestimation in winter months in the calibration, represented by PBIAS values 19.4, 7.7 and 0.2, respectively for the Padenstedt, Sarlhusen and Willenscharen gauges (Table 4). The validation of NO<sub>3</sub>-N load showed different behavior, with overestimation in winter months. The results of monthly NO<sub>3</sub>-N load simulation achieved R<sup>2</sup> between 0.86 - 0.96 for the calibration and 0.84 - 0.94 for

the validation; NSE was between 0.69 - 0.92 in calibration and 0.77 - 0.86 in the validation period (Table 4). According to Moriasi et al. (2007), these results indicated a performance ranging from good to very good for  $\text{NO}_3\text{-N}$  modeling with the SWAT model.

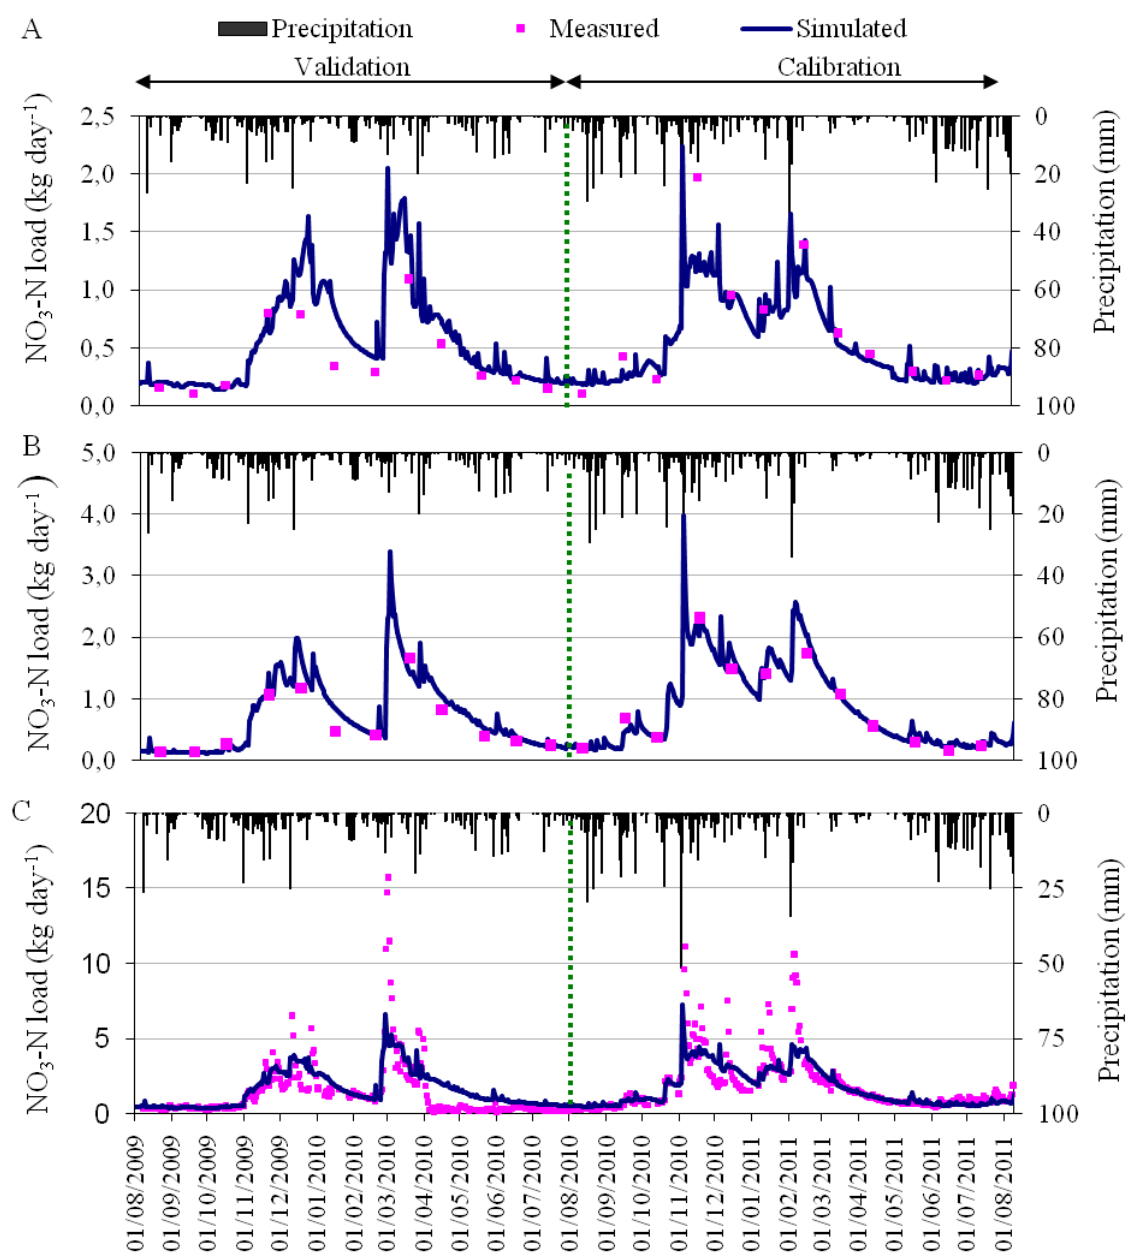

**Figure 2.** Measured and simulated daily  $\text{NO}_3\text{-N}$  loads at the gauges Padenstedt (A), Sarlhusen (B) and Willenscharen (C) in the calibration and validation periods.

One reason for the success of the  $\text{NO}_3\text{-N}$  load simulation in this lowland catchment may be attributed to the strong influence of hydrologic components linked to groundwater, as described by Pott et al. (2014). Table 1 describes the main parameters that were sensitive to  $\text{NO}_3\text{-N}$  load calibration, which can influence the subsurface movement of  $\text{NO}_3\text{-N}$ , such as the denitrification threshold of water content (SDNCO), nitrate percolation coefficient (NPERCO), fraction of porosity from which anions are excluded (ANION\_EXCL) and half-life of nitrate in the shallow aquifer (HLIFE\_NGW).

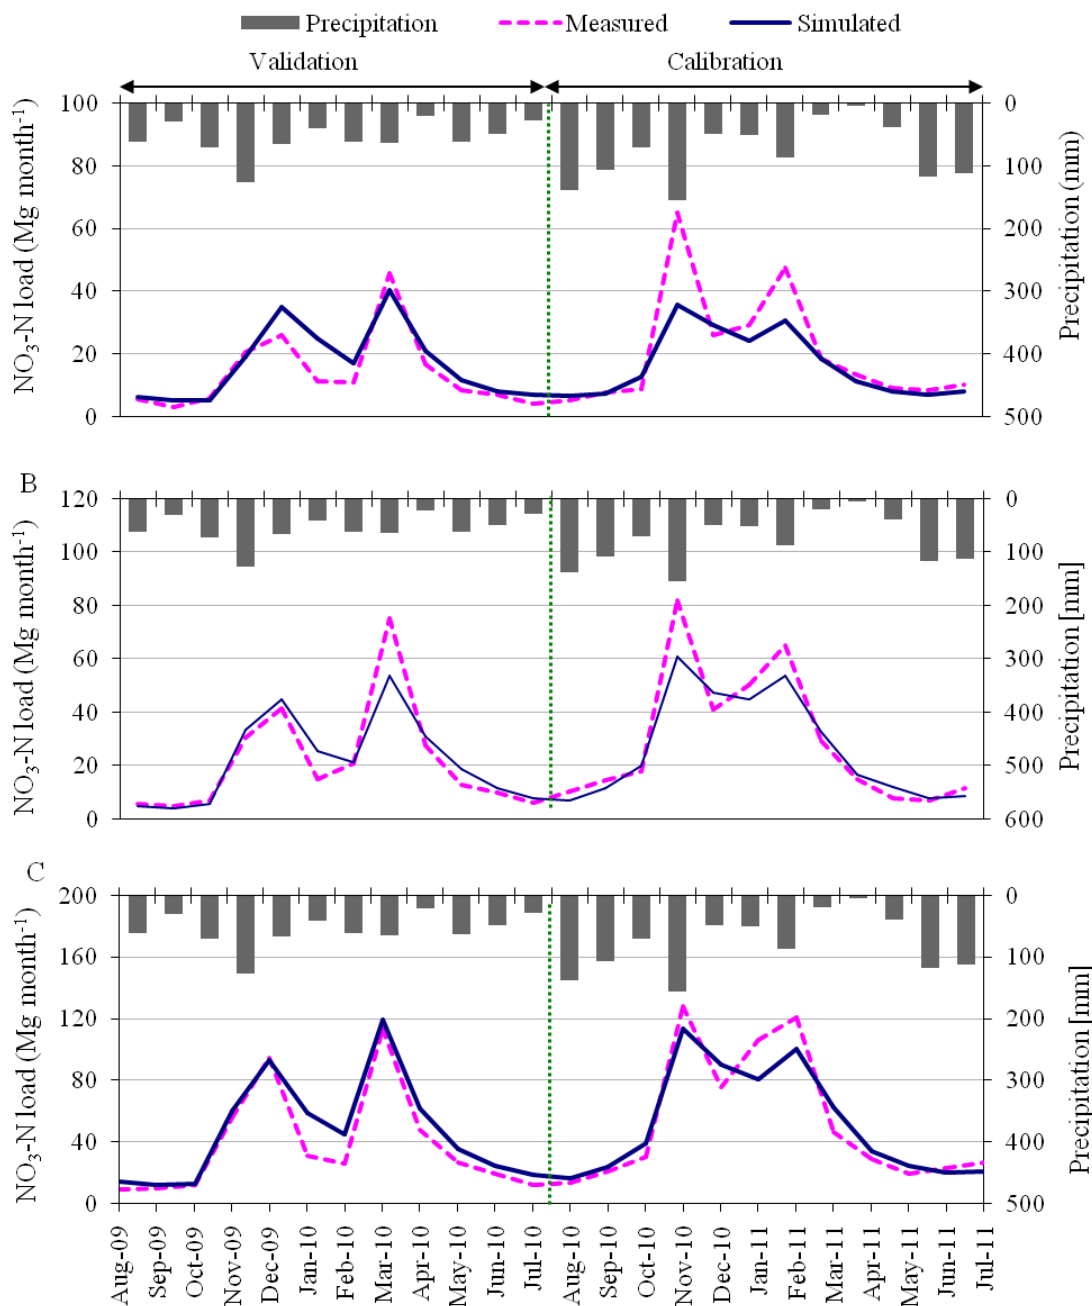

**Figure 3.** Measured and simulated monthly  $\text{NO}_3\text{-N}$  load at the Padenstedt (A), Sarlsruhe (B) and Willenscharen (C) gauges in the calibration and validation periods.

Daily monitoring is important to verify the real dynamics of water quality, such as peaks of nutrient concentration at specific times and could assist in understanding the dynamics of N by modeling, while monthly modeling quantifies the overall load occurring during a period of time.

With the SWAT model calibrated and validated, it was possible to conduct other studies in order to create alternative scenarios to reduce  $\text{NO}_3\text{-N}$  pollution. Hydrological processes that affect N processes are complex and ecohydrological modeling can assist in the understanding of changes that occur in the catchment, as well as changes that may improve future water quality.



**Table 3.** Performance rating parameters of the daily NO<sub>3</sub>-N load at the Padenstedt, Sarlhusen and Willenscharen gauges during the calibration and validation periods.

Gauge station	NO <sub>3</sub> -N <sub>measured</sub> (Mg day <sup>-1</sup> )	NO <sub>3</sub> -N <sub>simulated</sub> (Mg day <sup>-1</sup> )	R <sup>2</sup>	NSE	PBIAS
Calibration period					
Padenstedt	0.64	0.57	0.86	0.79	11.8
Sarlhusen	0.88	0.91	0.95	0.94	-3.3
Willenscharen	1.82	1.73	0.63	0.62	5.0
Validation period					
Padenstedt	0.41	0.55	0.86	0.50	-36.1
Sarlhusen	0.59	0.69	0.87	0.78	-17.4
Willenscharen	1.23	1.53	0.60	0.56	-24.3


**Table 4.** Performance rating parameters of the monthly NO<sub>3</sub>-N load at the Padenstedt, Sarlhusen and Willenscharen gauges during the calibration and validation periods.

Gauge station	NO <sub>3</sub> -N <sub>measured</sub> (Mg month <sup>-1</sup> )	NO <sub>3</sub> <sub>simulated</sub> (Mg month <sup>-1</sup> )	R <sup>2</sup>	NSE	PBIAS
Calibration period					
Padenstedt	20.8	16.8	0.86	0.69	19.4
Sarlhusen	29.2	27.0	0.93	0.90	7.7
Willenscharen	53.2	53.1	0.92	0.92	0.2
Validation period					
Padenstedt	13.9	16.8	0.84	0.77	-20.9
Sarlhusen	21.4	21.8	0.88	0.86	-2.2
Willenscharen	38.2	47.3	0.94	0.86	-24.0

The results of the reduction of the NO<sub>3</sub>-N load by implementing new BMPs scenarios with the SWAT model are shown in Figure 4. The BMPs linked with the reduction of fertilizer application (DMA50, DMA20, DFA20) were efficient to minimize the NO<sub>3</sub>-N load. BMPs related to the implementation of field filter strips were also effective in reducing the NO<sub>3</sub>-N load. WFS30 reduced NO<sub>3</sub>-N better than WFS10. Finally, the combination of various BMPs showed a greater reduction of N pollution. Two combinations were tested in this study, CMB1 and CMB2. CMB1 is a combination of the DMA20, DFA20 and WFS30 scenarios. CMB2 is a combination of the DMA50, DFA20 and WFS10 scenarios. CMB1 reduces 20% the mineral fertilizer and organic manure and introduces the 30 m-width of field filter strip. CMB2 works with a smaller filter strip (10m), but reduces the application of organic manure to 50%. It is clear that intensive BMPs are necessary to minimize N and P pollution in rivers coming from diffuse sources. In this case, a reduction of fertilizer application (organic or mineral) and/or an increase in protection areas (areas without use of fertilizer) are important to reduce the NO<sub>3</sub>-N and TP load into the rivers.

Laurent and Ruelland (2011), testing several alternative scenarios in a French catchment, verified that fertilizer reduction was the most effective practice to reduce NO<sub>3</sub>-N pollution. Other studies about SWAT modeling in lowland catchments aiming to determine new scenarios also verified efficient reduction of NO<sub>3</sub>-N pollution when the reduction of N fertilizer was simulated (Hesse et al., 2008; Lam et al., 2011). Hesse et al. (2008), reducing the N fertilizer in

agriculture areas, obtained a decrease of 13% of total nitrogen load. At the lowland Kielstau catchment, Lam et al. (2011) achieved reduction of 10% of  $\text{NO}_3\text{-N}$  load with an alternative scenario called Nutrient Management Plan, which consisted of a reduction of 20% of N fertilizer.

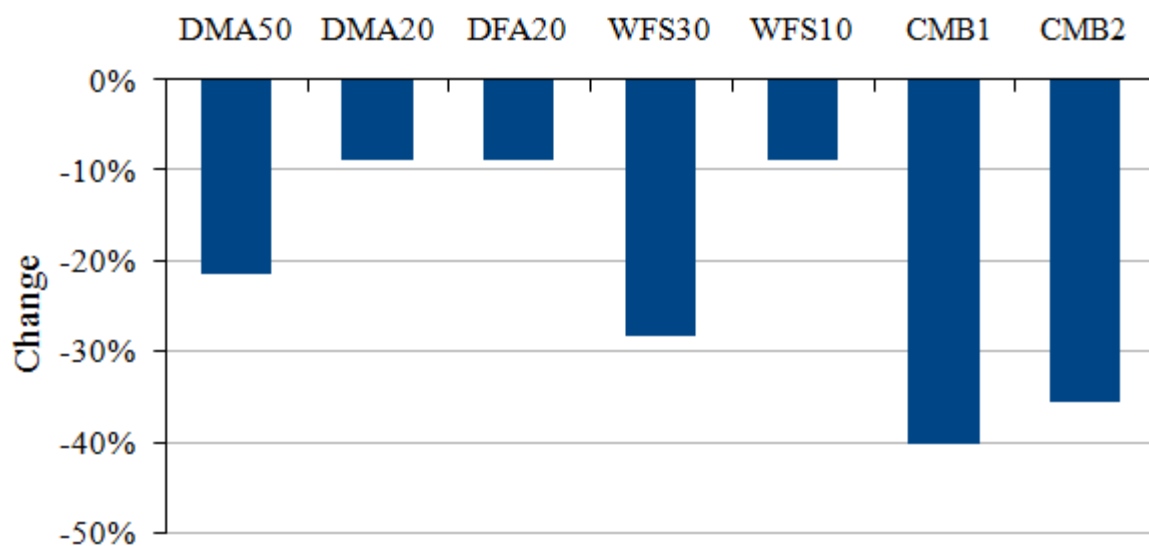

**Figure 4.** Average annual reduction in  $\text{NO}_3\text{-N}$  load at the Willenscharen gauge station by implementing new BMPs scenarios.

The success of  $\text{NO}_3\text{-N}$  load reduction by use of decreasing of N fertilizer can be attributed to the strong influence of hydrologic components linked to drainage and groundwater in this typist lowland catchment. Kennedy et al. (2012) also established the influence of tile drainage on  $\text{NO}_3\text{-N}$  load in different tile drainage densities. In this sense, there are important parameters that can influence the subsurface movement of  $\text{NO}_3\text{-N}$ , such as the denitrification threshold of water content (SDNCO), the  $\text{NO}_3$  percolation coefficient (NPERCO), the fraction of porosity from which anions are excluded (ANION\_EXCL) and the half-life of  $\text{NO}_3$  in the shallow aquifer (HLIFE\_NGW).

Ferrant et al. (2013) tested long-term simulation of  $\text{NO}_3\text{-N}$  mitigation using the TNT2 model in a pilot study catchment in France. They stated that a global reduction of fertilization by 10% would decrease  $\text{NO}_3\text{-N}$  fluxes in streams by 13.8%.

Although N input to water bodies from agricultural non-point sources of pollutants are difficult to control, it is of prime importance to continually search for ways to reduce inputs of contaminants into surface waters (Larose et al., 2011). The reduction of fertilizer application is one of the most effective BMPs to minimize the nitrate pollution in agriculture areas (Lam et al., 2011; Schilling and Wolter, 2009; Yevenes and Mannaerts, 2011). Schilling and Wolter (2009), employing the SWAT model, showed that the reduction of fertilizer applications from 170 to 50  $\text{kg ha}^{-1}$  achieved a 34.4% reduction in  $\text{NO}_3\text{-N}$  load in the Des Moines River watershed in USA. Yevenes and Mannaerts (2011), simulating land-use alternatives on  $\text{NO}_3\text{-N}$  load with the SWAT model in Portugal, stated that a fertilizer reduction scenario was effectively implemented to evaluate remedial  $\text{NO}_3\text{-N}$  control policies.

According to Kronvang et al. (2008) the successful reduction of N pollution in Denmark was due to three main policy instruments: i) mandatory requirements to improve treatment of wastewater treatment plants (WWTPs), including nitrogen removal at larger WWTPs; ii) mandatory fertilizer and crop rotation plans, with limits on the plant-available N applied to different crops; and iii) statutory norms for the proportion of manure N assumed to be available for plants. For Iital et al. (2005) the successful reduction of N pollution in Estonia was due to: i) a dramatic decrease in the use of organic and inorganic fertilizers and livestock numbers; ii)

an increased fraction of grassland and abandoned land at the expense of cultivated and ploughed areas; and iii) better farm-management practices. Nie et al. (2009) recommend the following effective methods for reducing N loss from farmlands: 1) use of best management practices, such as reduced irrigation and split application of N fertilizer; 2) use of controlled-release fertilizers instead of conventional fertilizers; 3) the adoption of high-N use efficiency crop genotypes; 4) the application of new tools, such as modeling, as well as N indexing; and 5) the use of deep-rooted crops in crop rotations systems.

#### 4. CONCLUSIONS

In general, monthly time increments of NO<sub>3</sub>-N load better predict observed performance than daily simulations.

A consistent data set of monitoring is essential to achieve good calibration and validation using an ecohydrological model, such as the SWAT model.

Most effective BMPs obtained to minimize N pollution were linked to the reduction of N fertilizer application and the increasing of conservation areas without the use of any fertilizer, such as field filter strips.

#### 5. ACKNOWLEDGEMENTS

We would like to thank the Coordenação de Aperfeiçoamento de Pessoal de Nível Superior (CAPES) for the doctorate scholarship of the first author.

#### 6. REFERENCES

- ARNOLD, J. G.; SRINIVASAN, R.; MUTTIAH, R. S.; WILLIAMS, J. R. Large area hydrologic modelling and assessment. Part I. Model development. **Journal of the American Water Resources Association**, v. 113, n. 2, p. 243-256, 1998. <http://dx.doi.org/10.1111/j.1752-1688.1998.tb05961.x>
- CAO, Z.; ZHANG, X.; AI, N. Effect of sediment on concentration of dissolved phosphorus in the Three Gorges Reservoir. **International Journal of Sediment Research**, v. 26, n. 1, p. 87-95, 2011. [http://dx.doi.org/10.1016/s1001-6279\(11\)60078-4](http://dx.doi.org/10.1016/s1001-6279(11)60078-4)
- CHON, H. S.; OHANDJA, D. G.; VOULVOULIS, N. A risk-based approach to prioritise catchments for diffuse metal pollution management. **Science of the total environment**, v. 437, n. p. 42-52, 2012. <http://dx.doi.org/10.1016/j.scitotenv.2012.07.045>
- DEUTSCHER WETTERDIENST – DWD. **Precipitation data 1975-2012, Climate station Padenstedt and Neumünster**. 2012. Available in: [http://werdis.dwd.de/werdis/start\\_js\\_JSP.do](http://werdis.dwd.de/werdis/start_js_JSP.do) Access in: 2012.
- FERRANT, S.; DURAND, P.; JUSTES, E.; PROBST, J.-L.; SANCHEZ-PEREZ, J.-M. Simulating the long-term impact of nitrate mitigation scenarios in a pilot study basin. **Agricultural Water Management**, v. 124, n. p. 85-96, 2013. <http://dx.doi.org/10.1016/j.agwat.2013.03.023>
- FINNERN, J. **Böden und Leitbodengesellschaften des Störeinzugsgebietes in Schleswig-Holstein: Vergesellschaftung und Stoffaustragsprognose (K, Ca, Mg) mittels GIS**. Kiel: Schriftenreihe des Instituts für Pflanzenernährung und Bodenkunde der Universität Kiel, 1997. 191p.

- FOHRER, N.; DIETRICH, A.; KOLYCHALOW, O.; ULRICH, U. Assessment of the environmental fate of the herbicides Flufenacet and Metazachlor with the SWAT Model. **Journal of environmental quality**, v. 43, n. 1, p. 75-85, 2014. <http://dx.doi.org/10.2134/jeq2011.0382>
- GRABOWSKA, M. The role of a eutrophic lowland reservoir in shaping the composition of river phytoplankton. **Ecohydrology & Hydrobiology**, v. 12, n. 3, p. 231-242, 2012. [http://dx.doi.org/10.1016/s1642-3593\(12\)70206-9](http://dx.doi.org/10.1016/s1642-3593(12)70206-9)
- HESSE, C.; KRYSANOVA, V.; PÄZOLT, J.; HATTERMANN, F. F. Eco-hydrological modelling in a highly regulated lowland catchment to find measures for improving water quality. **Ecological Modelling**, v. 218, n. 1-2, p. 135-148, 2008. <http://dx.doi.org/10.1016/j.ecolmodel.2008.06.035>
- IITAL, A.; STÅLNACKE, P.; DEELSTRA, J.; LOIGU, E.; PIHLAK, M. Effects of large-scale changes in emissions on nutrient concentrations in Estonian rivers in the Lake Peipsi drainage basin. **Journal of Hydrology**, v. 304, n. 1-4, p. 261-273, 2005. <http://dx.doi.org/10.1016/j.jhydrol.2004.07.034>
- JAMSHIDI, M.; TAJRISHY, M.; MAGHREBI, M. Modeling of point and non-point source pollution of nitrate with SWAT in the Jajrood river watershed, Iran. **International Agricultural Engineering Journal**, v. 19, n. 2, p. 23-31, 2010. <http://114.255.9.31/iaej/EN/Y2010/V19/I02/23>
- JARVIE, H. P.; WHITTON, B. A.; NEAL, C. Nitrogen and phosphorus in east coast British rivers: Speciation, sources and biological significance. **Science of The Total Environment**, v. 210-211, n. p. 79-109, 1998. [http://dx.doi.org/10.1016/s0048-9697\(98\)00109-0](http://dx.doi.org/10.1016/s0048-9697(98)00109-0)
- JARVIE, H. P.; WITHERS, P. J. A.; BOWES, M. J.; PALMER-FELGATE, E. J.; HARPER, D. M.; WASIAK, K. et al. Streamwater phosphorus and nitrogen across a gradient in rural-agricultural land use intensity. **Agriculture, Ecosystems & Environment**, v. 135, n. 4, p. 238-252, 2010. <http://dx.doi.org/10.1016/j.agee.2009.10.002>
- KENNEDY, C. D.; BATAILLE, C.; LIU, Z.; ALE, S.; VANDEVELDE, J.; ROSWELL, C. R. et al. Dynamics of nitrate and chloride during storm events in agricultural catchments with different subsurface drainage intensity (Indiana, USA). **Journal of Hydrology**, v. 466-467, n. p. 1-10, 2012. <http://dx.doi.org/10.1016/j.jhydrol.2012.05.002>
- KRONVANG, B.; ANDERSEN, H. E.; BØRGESEN, C.; DALGAARD, T.; LARSEN, S. E.; BØGESTRAND, J. et al. Effects of policy measures implemented in Denmark on nitrogen pollution of the aquatic environment. **Environmental Science & Policy**, v. 11, n. 2, p. 144-152, 2008. <http://dx.doi.org/10.1016/j.envsci.2007.10.007>
- LAM, Q. D.; SCHMALZ, B.; FOHRER, N. Ecohydrological modelling of water discharge and nitrate loads in a mesoscale lowland catchment, Germany. **Advances in Geosciences**, v. 21, n. p. 49-55, 2009. <http://dx.doi.org/10.5194/adgeo-21-49-2009>
- LAM, Q. D.; SCHMALZ, B.; FOHRER, N. Modelling point and diffuse source pollution of nitrate in a rural lowland catchment using the SWAT model. **Agricultural Water Management**, v. 97, n. 2, p. 317-325, 2010. <http://dx.doi.org/10.1016/j.agwat.2009.10.004>

- LAM, Q. D.; SCHMALZ, B.; FOHRER, N. The impact of agricultural Best Management Practices on water quality in a North German lowland catchment. **Environmental monitoring and assessment**, v. 183, n. 1-4, p. 351-379, 2011.
- LAM, Q. D.; SCHMALZ, B.; FOHRER, N. Assessing the spatial and temporal variations of water quality in lowland areas, Northern Germany. **Journal of Hydrology**, v. 438-439, n. p. 137-147, 2012. <http://dx.doi.org/10.1016/j.jhydrol.2012.03.011>
- LAROSE, M.; HEATHMANN, G. C.; NORTON, D.; SMITH, D. Impacts of conservation buffers and grasslands on total phosphorus loads using hydrological modeling and remote techniques. **Catena**, v. 2, n. p. 121-129, 2011. <https://doi.org/10.1016/j.catena.2011.03.005>
- LAURENT, F.; RUELLAND, D. Assessing impacts of alternative land use and agricultural practices on nitrate pollution at the catchment scale. **Journal of Hydrology**, v. 409, n. 1-2, p. 440-450, 2011. <http://dx.doi.org/10.1016/j.jhydrol.2011.08.041>
- LIU, R.; ZHANG, P.; WANG, X.; CHEN, Y.; SHEN, Z. Assessment of effects of best management practices on agricultural non-point source pollution in Xiangxi River watershed. **Agricultural Water Management**, v. 117, n. p. 9-18, 2013. <http://dx.doi.org/10.1016/j.agwat.2012.10.018>
- LANDESBETRIEB FÜR KÜSTENSCHUTZ, NATIONALPARK UND MEERESSCHUTZ SCHLESWIG-HOLSTEIN - LKN. **Discharge data from gauges Padenstedt, Sarlhusen and Willenscharen**. LKN: Schleswig-Holstein, 2012. 100p.
- LANDWIRTSCHAFTSKAMMER SCHLESWIG-HOLSTEIN - LWK. **Richtwerte für die Düngung 2011**. 21. ed. Rendsburg: LWK, 2011. 280p.
- MERSEBURGER, G.; MARTI, E.; SABATER, F.; ORTIZ, J. D. Point-source effects on N and P uptake in a forested and an agricultural Mediterranean streams. **Science of the Total Environment**, v. 409, n. 5, p. 957-67, 2011. <http://dx.doi.org/10.1016/j.scitotenv.2010.11.014>
- MORIASI, D. N.; ARNOLD, J. G.; LIEW, M. W. V.; BINGNER, R. L.; HARMEL, R. D.; VEITH, T. L. Model evaluation guidelines for systematic quantification of accuracy in watershed simulations. **Transactions of the ASABE**, v. 50, n. 3, p. 885-900, 2007. <http://dx.doi.org/10.13031/2013.23153>
- NASH, J. E.; SUTCLIFFE, J. V. River flow forecasting through conceptual models part I — A discussion of principles. **Journal of Hydrology**, v. 10, n. 3, p. 282-290, 1970. [https://doi.org/10.1016/0022-1694\(70\)90255-6](https://doi.org/10.1016/0022-1694(70)90255-6)
- NEITSCH, S. L.; ARNOLD, J. G.; KINIRTY, J. R.; WILLIAMS, J. R. **Soil and water assessment tool**: Theoretical documentation Version 2009. Grassland: Blackland Research Center; Texas Agricultural Experimental Station Soil; Water Research Laboratory; Agricultural Research Service, 2011. 618p.
- NIE, S.-W.; GAO, W.-S.; CHEN, Y.-Q.; SUI, P.; ENEJI, A. E. Review of current status and research approaches to nitrogen pollution in farmlands. **Agricultural Sciences in China**, v. 8, n. 7, p. 843-849, 2009. [http://dx.doi.org/10.1016/s1671-2927\(08\)60286-2](http://dx.doi.org/10.1016/s1671-2927(08)60286-2)



- OPPELT, N.; RATHJENS, H.; BAASE, T. **Landnutzungsklassifikation des Einzugsgebietes der oberen Stör auf Basis von Landsat TM Daten aus dem Jahr 2010**. Kiel: Christian-Albrechts-University, 2011. 50p.
- PIETERSE, N. M.; BLEUTEN, W.; JØRGENSEN, S. E. Contribution of point sources and diffuse sources to nitrogen and phosphorus loads in lowland river tributaries. **Journal of Hydrology**, v. 271, n. 1-4, p. 213-225, 2003. [http://dx.doi.org/10.1016/s0022-1694\(02\)00350-5](http://dx.doi.org/10.1016/s0022-1694(02)00350-5)
- PISINARAS, V.; PETALAS, C.; GIKAS, G. D.; GEMITZI, A.; TSIHRINTZIS, V. A. Hydrological and water quality modeling in a medium-sized basin using the Soil and Water Assessment Tool (SWAT). **Desalination**, v. 250, n. 1, p. 274-286, 2010. <http://dx.doi.org/10.1016/j.desal.2009.09.044>
- POTT, C. A.; JADOSKI, S. O.; SCHMALZ, B.; HÖRMANN, G.; FOHRER, N. Temporal variability of nitrogen and phosphorus concentrations in a German catchment: Water sampling implication. **Revista Brasileira de Engenharia Agrícola e Ambiental**, v. 18, n. 8, p. 811-818, 2014. <http://dx.doi.org/10.1590/1807-1929/agriambi.v18n08p811818>
- SCHILLING, K. E.; WOLTER, C. F. Modeling nitrate-nitrogen load reduction strategies for the Des Moines River, Iowa using SWAT. **Environmental management**, v. 44, n. 4, p. 671-82, 2009. <http://dx.doi.org/10.1007/s00267-009-9364-y>
- WU, N.; SCHMALZ, B.; FOHRER, N. Distribution of phytoplankton in a German lowland river in relation to environmental factors. **Journal of Plankton Research**, v. 33, n. 5, p. 807-820, 2011. <http://dx.doi.org/10.1093/plankt/fbq139>
- YEVENES, M. A.; MANNAERTS, C. M. Seasonal and land use impacts on the nitrate budget and export of a mesoscale catchment in Southern Portugal. **Agricultural Water Management**, v. 102, n. 1, p. 54-65, 2011. <http://dx.doi.org/10.1016/j.agwat.2011.10.006>